



Portable Electric Chain Hoist


Portable
Compact
Light Weight
Powerful



Standard Features on the Advantage Portable Electric Chain Hoist

Features:

- Available in both 1 phase 100-120v, 200-240v 60Hz/50Hz
- Standard Ip54.motor insulation F and over heat protection.
- Variable frequency control, low starting current, high efficiency.
- Standard 2 speed control, with infinitely variable low speed using adjustable knob on pushbutton.
- Clutch serves as overload limit, as well as upper/lower limit switch.

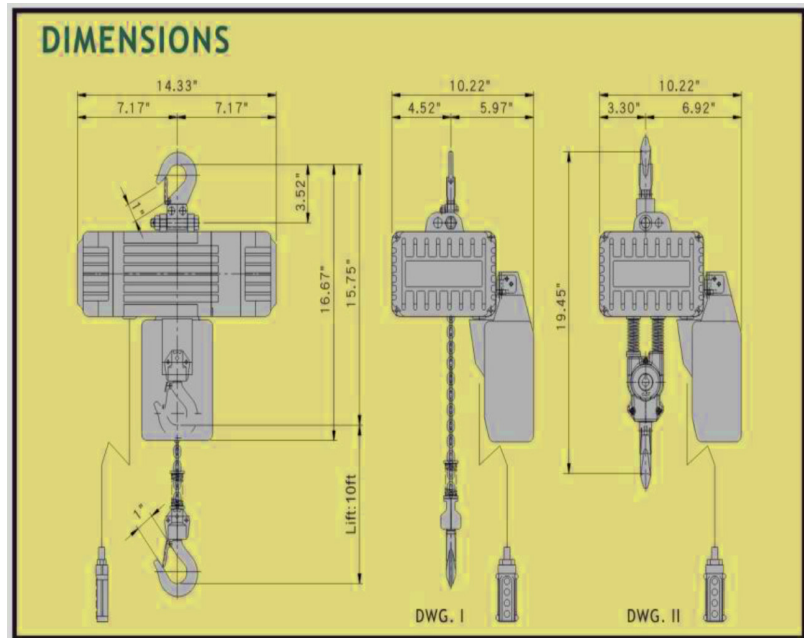

Rated Power Source			Single Phase 110V/60 Hz							
Model (Dual – Speed – Type)	Rated Load (Lbs)	Motor Output (HP)	Time Rating (Min)	Intermittent Duty		Rated Current	Lifting Speed (ft/min)	Standard Lift	Push Button Cord (ft)	Fall
				Duty Rating (%ED)	Max Starting Frequency (times/hr)					
A-Port – 1/8	175	0.4	15	30	180	110v	0-15.7/59	10	8	1
A-Port-1/4	500	0.8	15	30	180	110v	0-15.7/41	10	8	1
A-Port-1/2	1000	0.8	15	30	180	110v	0-7.8/29.5	10	8	1



10200 Jacksboro Hwy. Fort Worth, TX 76135
 - 817-237-7700 www.advantagehoist.com